


Celtic Knots

Over 1700 pages of free wire designs and tips at www.wigjig.com



Make a starting loop, and place it on peg 1. Bring the wire between pegs 1 and 2, under peg 3, and wrap up and around peg 3, with the tail going under peg 2. Bring the wire up & wrap around peg 2, down and under peg 5. Bring the wire up & around peg 5, then across and under peg 4. Bring wire up & around peg 4, wrapping clockwise with the tail going across and under peg 7. Bring the wire up and wrap around peg 7. Continue the wire under and wrap peg 6, with the tail under peg 9. Remove from the Athena. Turn the design over and upside down. Place the loops back on pegs 6 and 7, with the tail going over the top of peg 5. You will now be working back up the pegs toward the smaller end. Remember that as you reverse the process, the wire must now be on top of the pegs and each wrap will be wrapped down instead of up. Bring the wire down and wrap around peg 5, continuing across and over the top of peg 4. Wrap down and around peg 4, with the tail going across and over the top of peg 3. Bring the wire down and wrap peg 3. Continue the wire across over peg 2 and wrap down. The wire tail will again be over peg 3. Make the last loop around peg 1. Remove the piece from the Athena and gently adjust the loops. Clip wire tail, and flatten/harden with nylon jaw pliers.

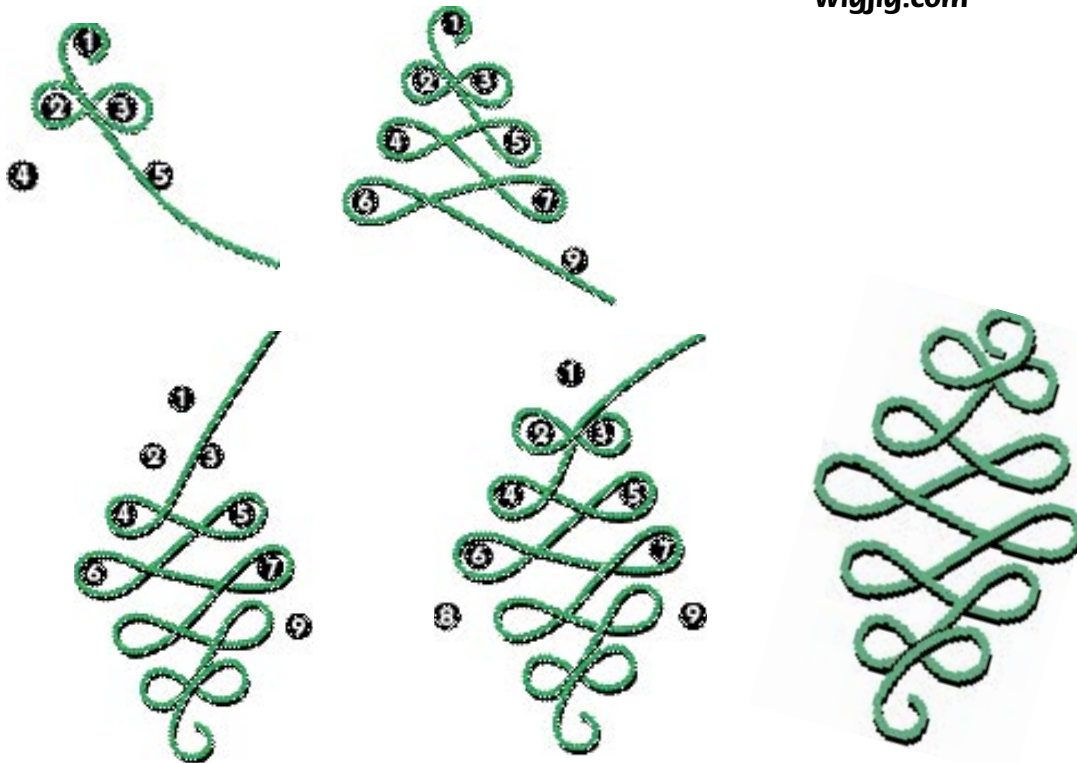


Variation: After forming seven loops, remove from jig, clip wire tail, and form a loop with round nose pliers. Flatten/harden with nylon jaw pliers.

WIGJIG, PO Box 5306, Arlington, VA 22205,
(800) 579-WIRE (703) 995-4867 (fax)
www.wigjig.com


Copyrighted by WIGJIG, 1997. Wigjigs® are patented.

Triangle Earrings

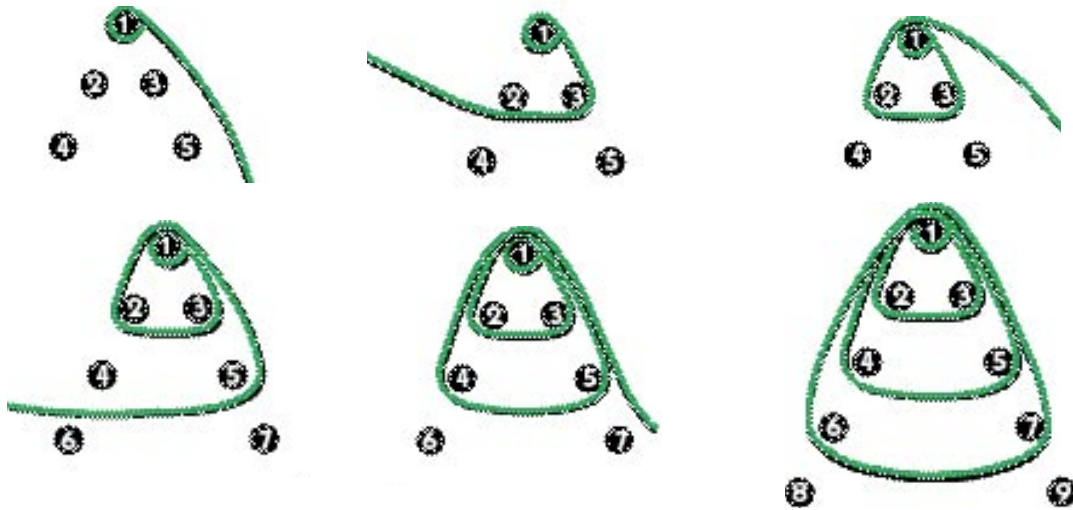

Make a loop and place it on peg 1 with the tail going down the outside of the pegs toward peg 3. Wrap around peg 3, with the tail going toward and under peg 2. Continue the wire under peg 2 and up and over peg 1. Wrap the wire under peg 5, and continue under peg 4. Bring the wire up and around peg 4, and continue around peg 1. The tail of the wire continues down the outside of the pegs toward peg 7. Complete by wrapping under peg 7 and under peg 6. Bring the wire up, and completely wrap around peg 1, making a clockwise loop. Remove the design from the jig, and clip the wire tail with flush cutters. Flatten/harden with nylon jaw pliers. Add an "S-Chain" loop (below) to the loop at the top and attach to an ear wire.

S-Chain

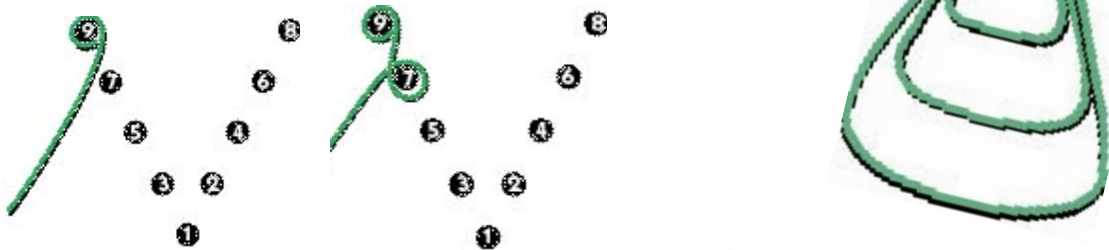

To make a smaller design, end the wrapping at pegs 4 and 5. Finish by making the clockwise ending loop around peg 1.



Make a starting loop. Place the loop on peg 9. Wrap counter-clockwise around peg 7. Remove from the jig, clip the wire tail with flush cutters, and flatten/harden with nylon jaw pliers.

Over 1700 pages of free wire designs and tips at www.wigjig.com